



A selection from our range



Scan the QR-Code for more than 50.000 articles in the webshop!



+31 (0)320 28 55 44 | [verkoop@asf-fischer.nl](mailto:verkoop@asf-fischer.nl) | [www.asf-fischer.nl](http://www.asf-fischer.nl)  
[www.webshop.asf-fischer.nl](http://www.webshop.asf-fischer.nl)



Woodies® Ultimate Shield Outdoor Blackline screws are according to the C4 standard. This indicates that the coating of these screws is extremely suitable for outdoor use. This makes these screws ideal for use in combination with GB's black garden fittings. The Blackline hinge screw can be perfectly combined with the black QlinQ® hinges.

The Blackline screws are available in:


- Countersunk head screws
- Pan head screws
- Post shoe screws
- Wafer head screws
- Cladding screws
- Hinge screws



The QlinQ® Blackline program contains hexagon head wood screws, carriage bolts, nuts and washers in the fasteners range. The door fittings range includes black paumelles, hinges, door handles and door shields.



Hinges, thumbs, T-hinges, latches and door stop brackets are available in a black powder-coated (EPZ) version of Gebroeders Bodegraven garden fittings. GB strives for a good quality product. A powder coating has been chosen for the garden fittings in EPZ. Powder coating with proper pre-treatment largely determines the lifespan and quality of the product. The purpose of the pre-treatment is to remove contaminants, promote adhesion and to provide additional corrosion protection.

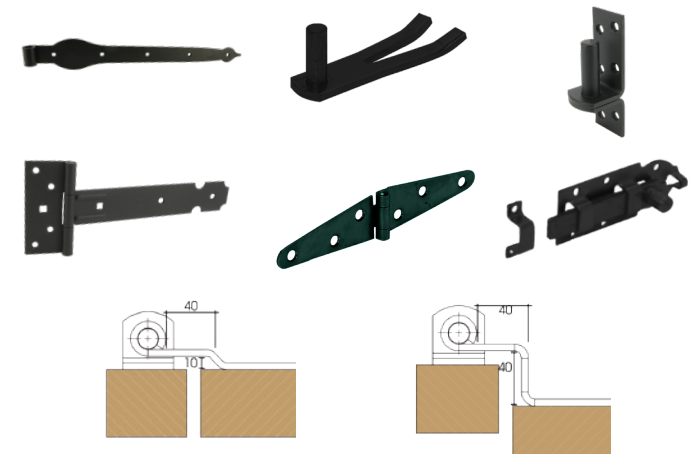

10 x 40 mm  
Ø16 mm  
Square holes

40 x 40 mm  
Ø16 mm  
Square holes

**Characteristics:**

- C4 Qualification
- EP5 Coating
- Chrom-6 free
- Nordtest NT Mat003 Class 4
- RoHS Compliant
- 30 Kesternich cycles
- Up to 2000 hours salt spray test ASTM B117

GB's hinges consist of 3 different types, for both the standard and the Rustica version. The hinges without offset and bend, the hinges for flat work with an offset of 10mm and a bend of 40mm and the curved hinges with an offset and bend of 40mm. These are intended for the use of Ø16 thumbs and have square holes for the use of carriage bolts